

LED Batten Light




Product Features

- Good heat dissipation system: 6063 Aluminum housing + 6063 Aluminum board + Aluminum PCB;
- Anti-UV High Efficiency PC reeded cover (UL94V-2) with material from Japan TEIJIN;
- Excellent light distribution, very uniform;
- Easy installation with clip-on brackets;
- SAA, C-TICK, CE, RoHS.




Specifications

Product Code	LS010WBT060 LS020WBT060	LS020WBT120 LS030WBT120 LS040WBT120	LS030WBT150 LS060WBT150
Dimension (LXWXH)	590X80X64.5mm	1190X80X64.5mm	1490X80X64.5mm
Power Consumption	10W; 20W	20W; 30W; 40W	30W; 60W
Luminous Flux	1000lm; 2000lm	2000lm; 3000lm; 4000lm	3000lm; 6000lm
Total Led Qty.	60PCS; 120PCS	120PCS; 180PCS; 240PCS	169PCS; 360PCS
Light Efficacy	100LM/W		
Led Spec.	SMD 2835, LM80 Approved		
CRI & SDCM	Ra80+; SDCM<5		
CCT	4000K/5000K		
Beam Angle	120°		
Power Factor	>0.95 (10W: >0.90)		
Input Voltage	220~240Vac		
IP Rate	Ip42		
Working Temp.	-20°C ~40 °C		
Lifespan	>36000 hours		
Warranty	3 years		

Detailed Pictures

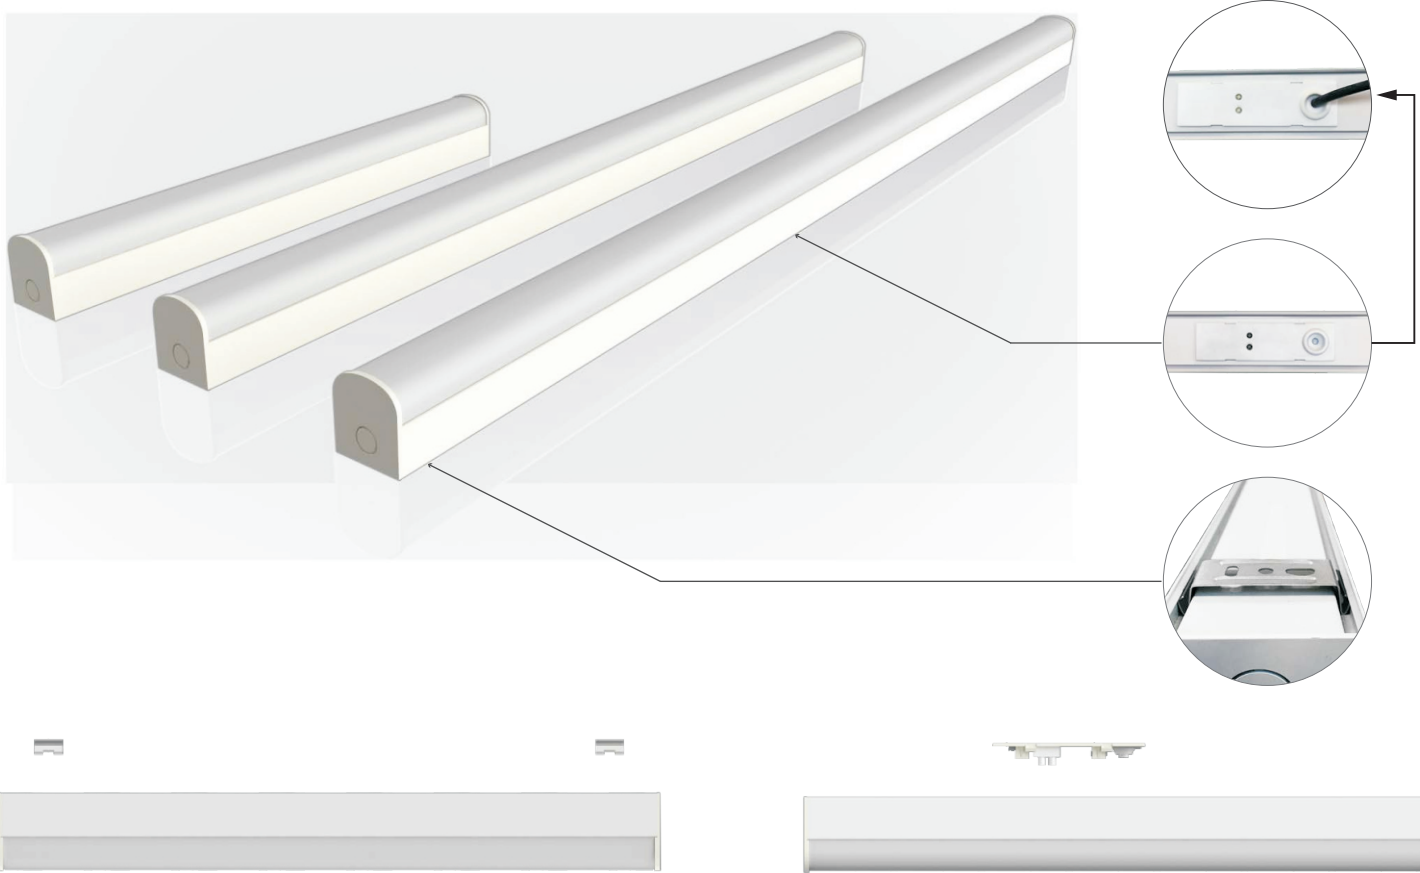

Dimension (mm)

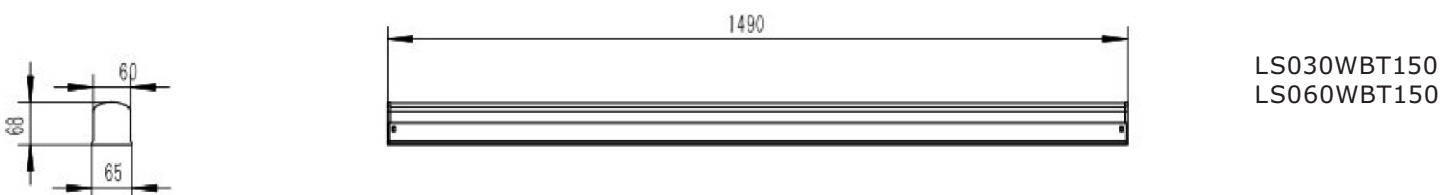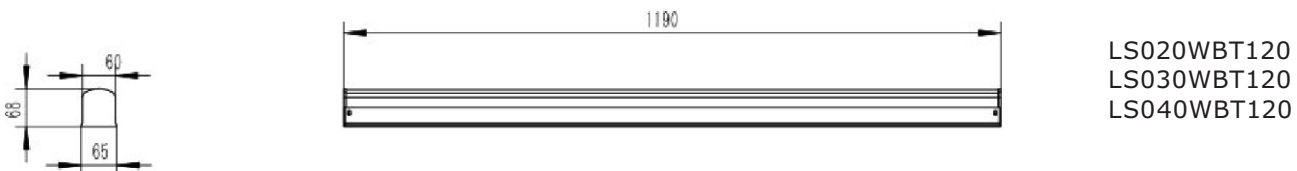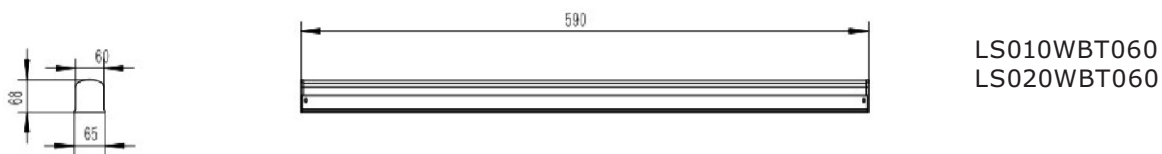

Packing Details

0. 6 Meter

1. Carton Size(cm) : 65. X30X28
2. Qty/Ctn. : 9pcs
3. Gross Weight/ctn. : 11. 5kgs


1. 2 Meter

1. Carton Size(cm) : 125. X30X28
2. Qty/Ctn. : 9pcs
3. Gross Weight/ctn. : 18kgs

1. 5 Meter

1. Carton Size(cm) : 155. X30X19
2. Qty/Ctn. : 6pcs
3. Gross Weight/ctn. : 16. 5kgs

Installation

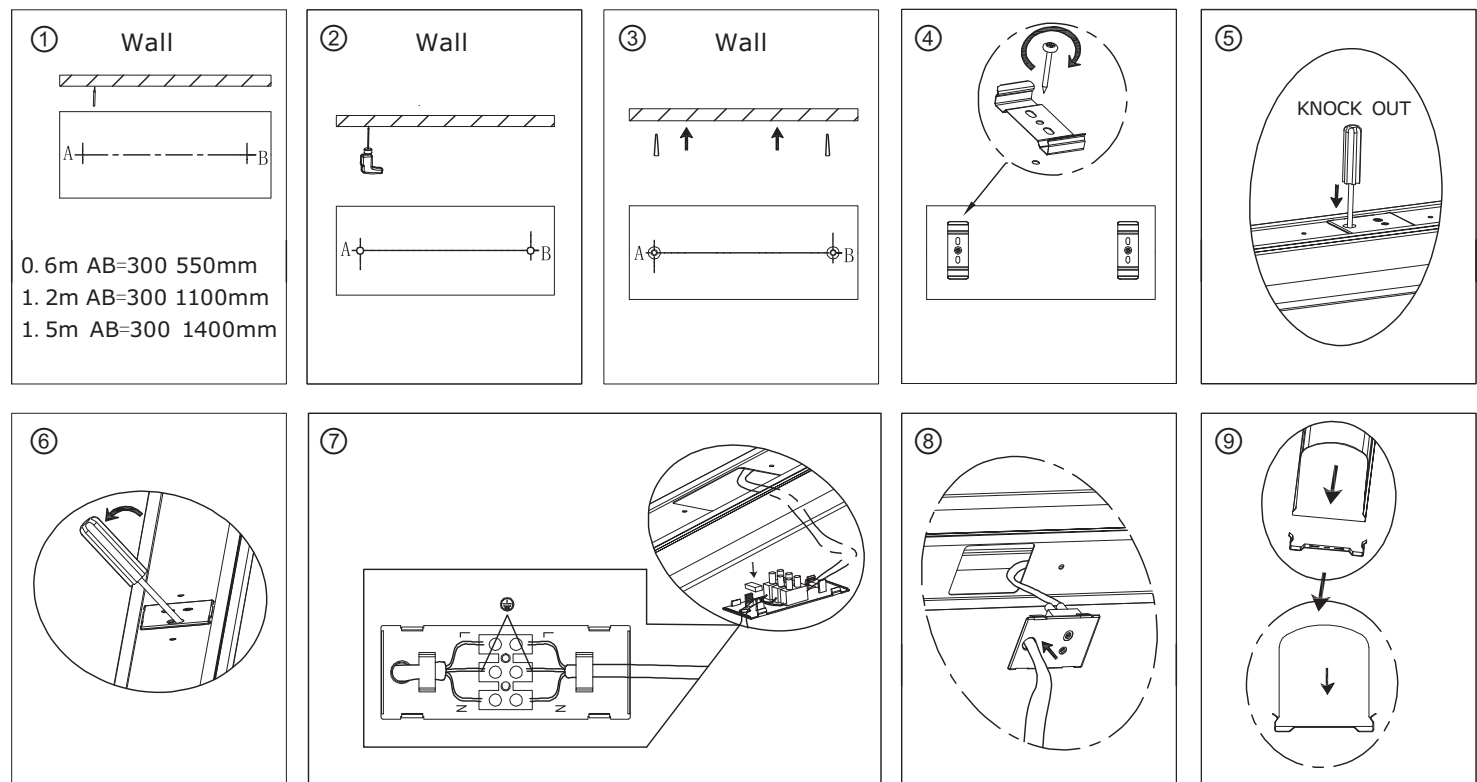

Application

