

UFO High Bay




Product Features

- Modern Design;
- Luminaire Efficacy upto 140 LM/W;
- 3 Distribution Types: Lens in 60° and 90°, Glass in 110°;
- Surface Mounting Bar Available upon Request.

Specifications

Product Code	LE060WHBU	LE100WHBU	LE120WHBU	LE150WHBU	LE200WHBU	LE240WHBU
Power Consumption	60W	100W	120W	150W	200W	240W
Luminous Flux	7800~8400LM	13000~14000LM	15600~16800LM	19500~21000LM	26000~28000LM	31200~33600LM
Luminaire Efficacy	130 ~ 140LM/W					
LED Chip	Lumileds 3030					
Beam Angle	60° , 90° , 110° (60W: 110° only)					
CCT	4000K / 5000K / 5700K / 6500K					
CRI	70+					
MacAdam Ellipse	Within 5 Steps					
Driver	SOSEN / MEAN WELL					
Input Voltage	220 ~ 240Vac / 100 ~ 277Vac					
Power Factor	> 0.95					
Working Temp.	-30 C ~ +40 C					
IP Rate	IP65					
Lifetime	TM-21 Projection L ₉₀ > 54000 hrs					
Certificates	CE ; RoHS ; SAA ; C-Tick					
Warranty	5 Years					

Product Details

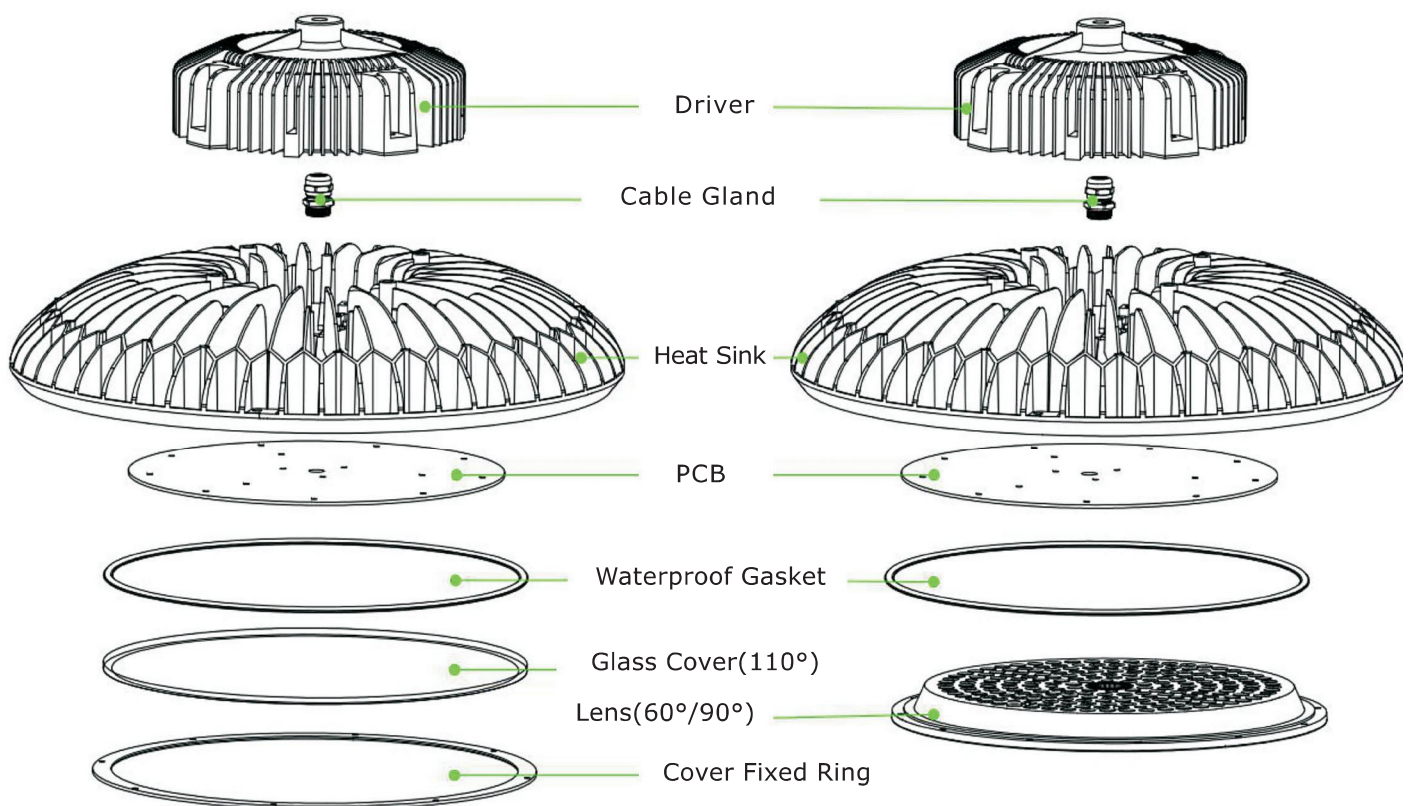

Mounting Device Options



Eye bolt (default)



Carabiner hook



Socket set screw



Yoke



Diffuser Options



Aluminum diffuser
(60W/100W/120W/150W)



Aluminum diffuser
(200W/240W)




PC diffuser




PC diffuser + PC lid




Optical Parameters

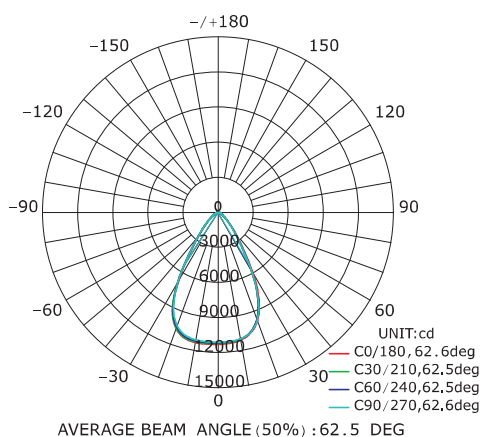


100W 60°

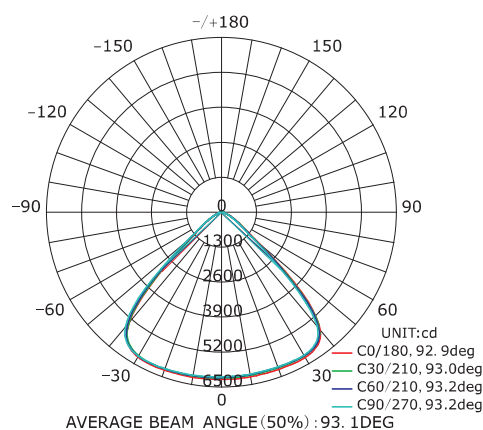


100W 90°

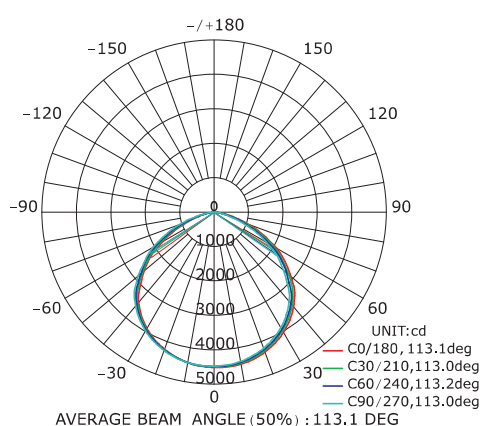


100W 110°

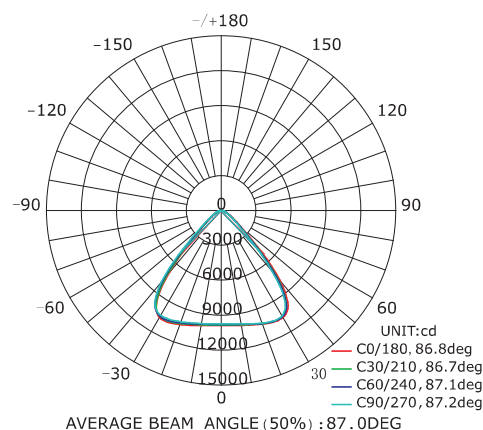



150W 90°

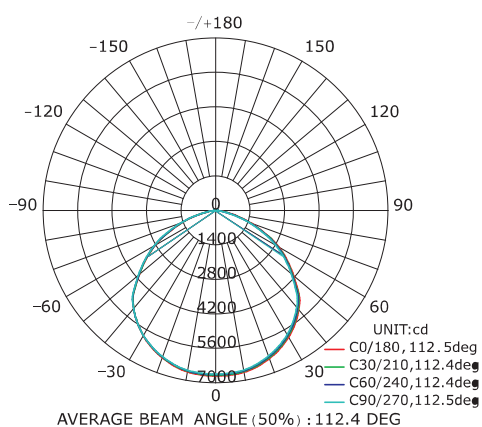

150W 110°

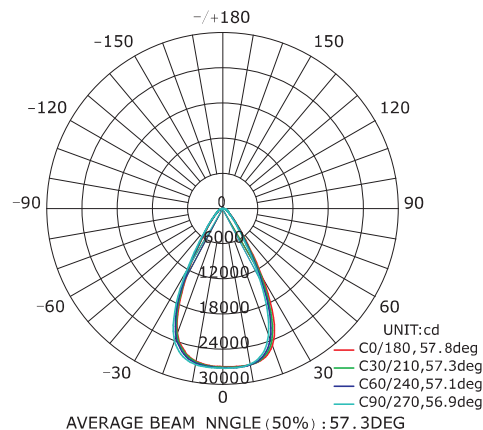


200W 60°

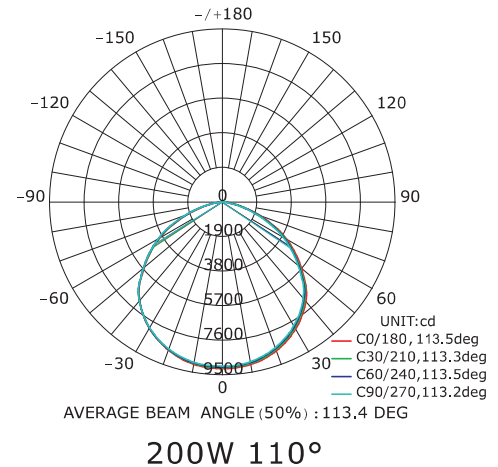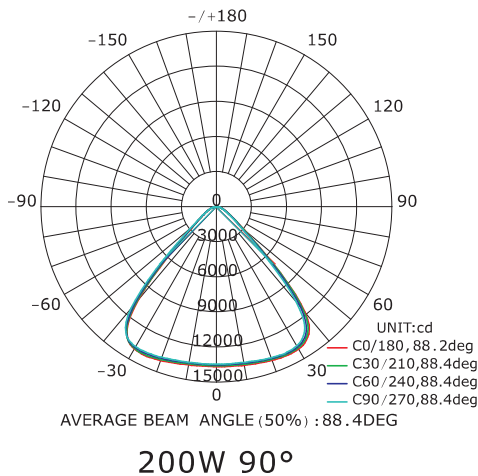

Dimension & Package

60W

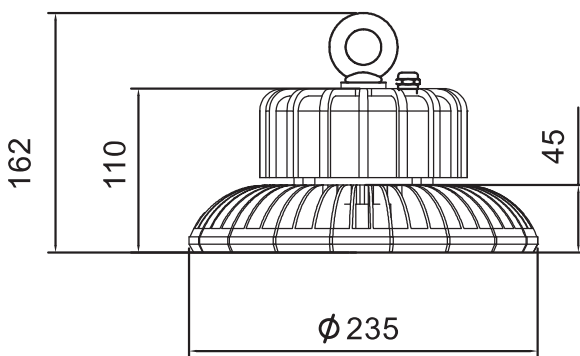

UFO High Bay

1. Carton Size: 300x300x200 mm
2. Qty. / Ctn.: 1PCS
3. 2.5 KG / Carton


PC Diffuser

1. Carton Size: 325x325x350 mm
2. Qty. / Ctn.: 10PCS
3. 7.7 KG / Carton

Aluminum Diffuser

1. Carton Size: 300x300x315 mm
2. Qty. / Ctn.: 10PCS
3. 3.5 KG / Carton

100W/120W

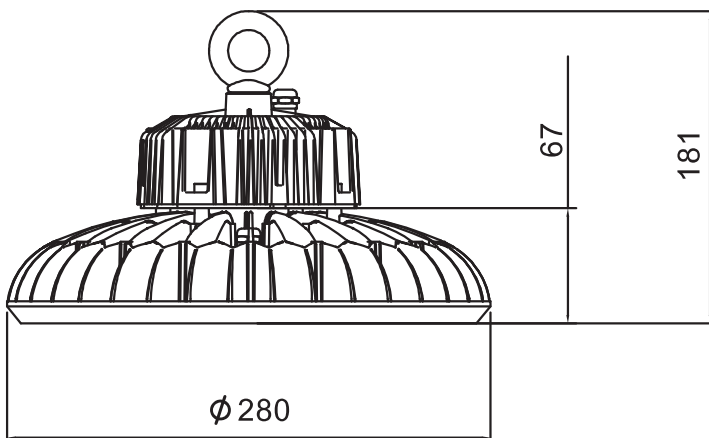

UFO High Bay


1. Carton Size: 350x350x200 mm
2. Qty. / Ctn.: 1PCS
3. 4.5 KG / Carton

PC Diffuser

1. Carton Size: 325x325x325 mm
2. Qty. / Ctn.: 10PCS
3. 7 KG / Carton

Aluminum Diffuser

1. Carton Size: 340x340x315 mm
2. Qty. / Ctn.: 10PCS
3. 4 KG / Carton

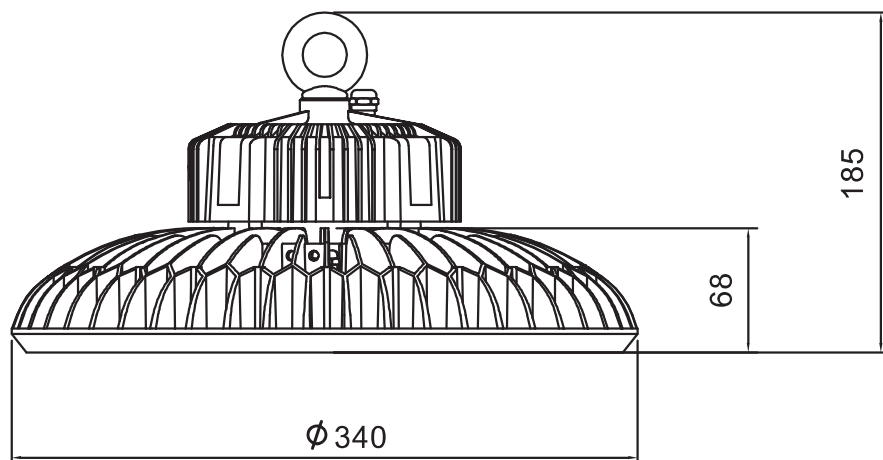150W**UFO High Bay**


1. Carton Size: 400x400x200 mm
2. Qty. / Ctn.: 1PCS
3. 6.3 KG / Carton

PC Diffuser

1. Carton Size: 325x325x285 mm
2. Qty. / Ctn.: 10PCS
3. 5.5 KG / Carton

Aluminum Diffuser

1. Carton Size: 450x450x385 mm
2. Qty. / Ctn.: 10PCS
3. 8.5 KG / Carton

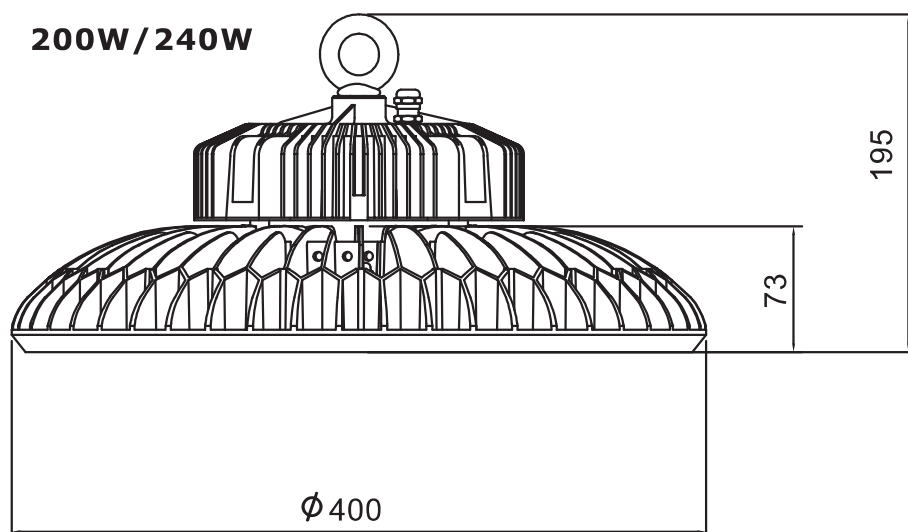200W / 240W**UFO High Bay**

1. Carton Size: 450x450x200 mm
2. Qty. / Ctn.: 1PCS
3. 7.5 KG / Carton



PC Diffuser

1. Carton Size: 430x430x365 mm
2. Qty. / Ctn.: 10PCS
3. 9.5 KG / Carton

Aluminum Diffuser


1. Carton Size: 460x460x345 mm
2. Qty. / Ctn.: 10PCS
3. 7.1 KG / Carton

Wiring

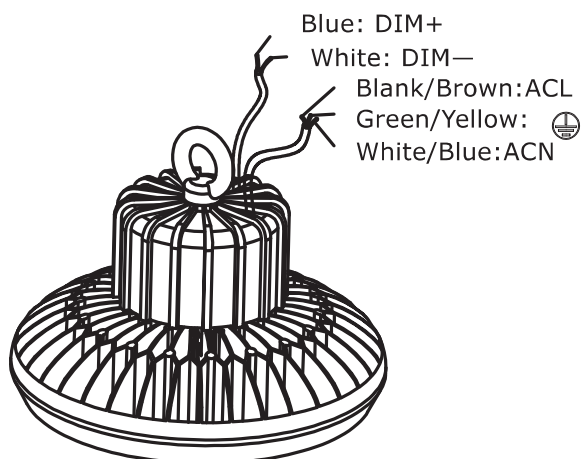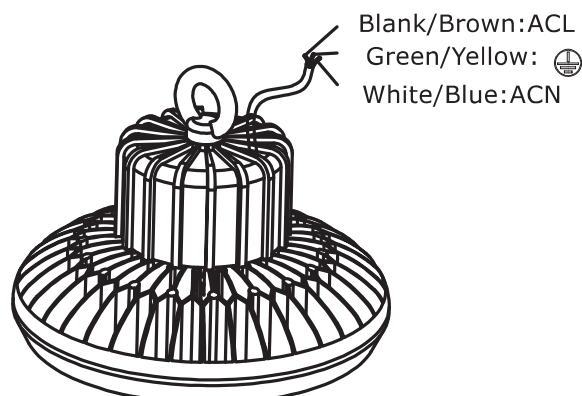
Wiring of Dimming**Wiring of not Dimming**

Installation

Option A:

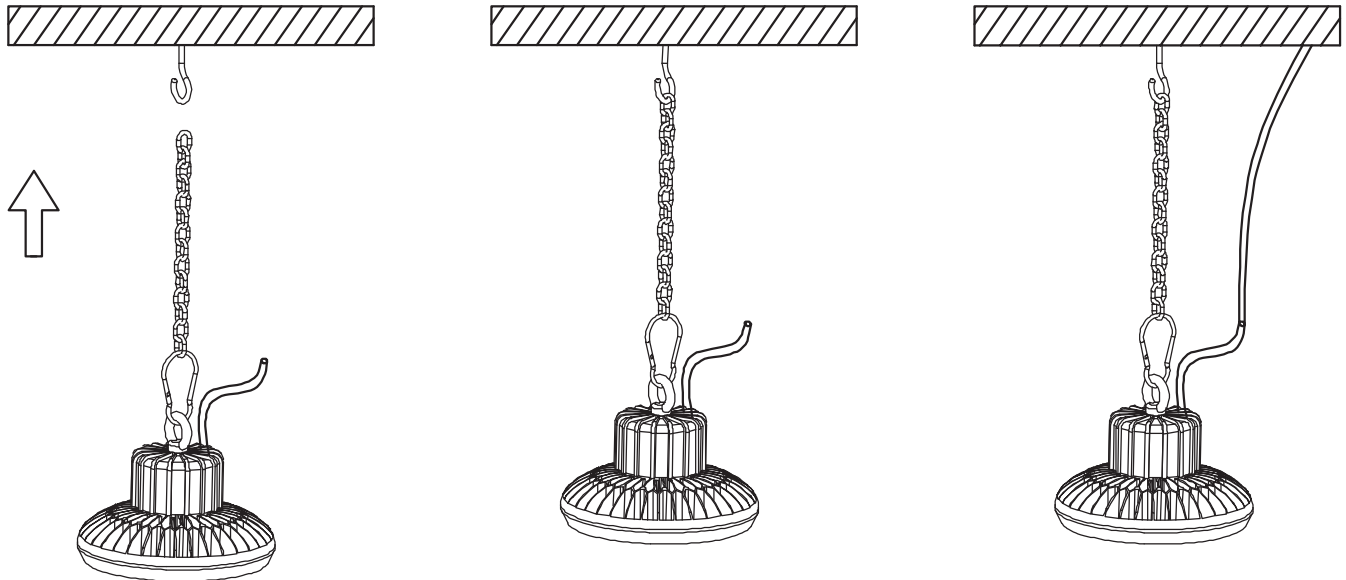

Option B:

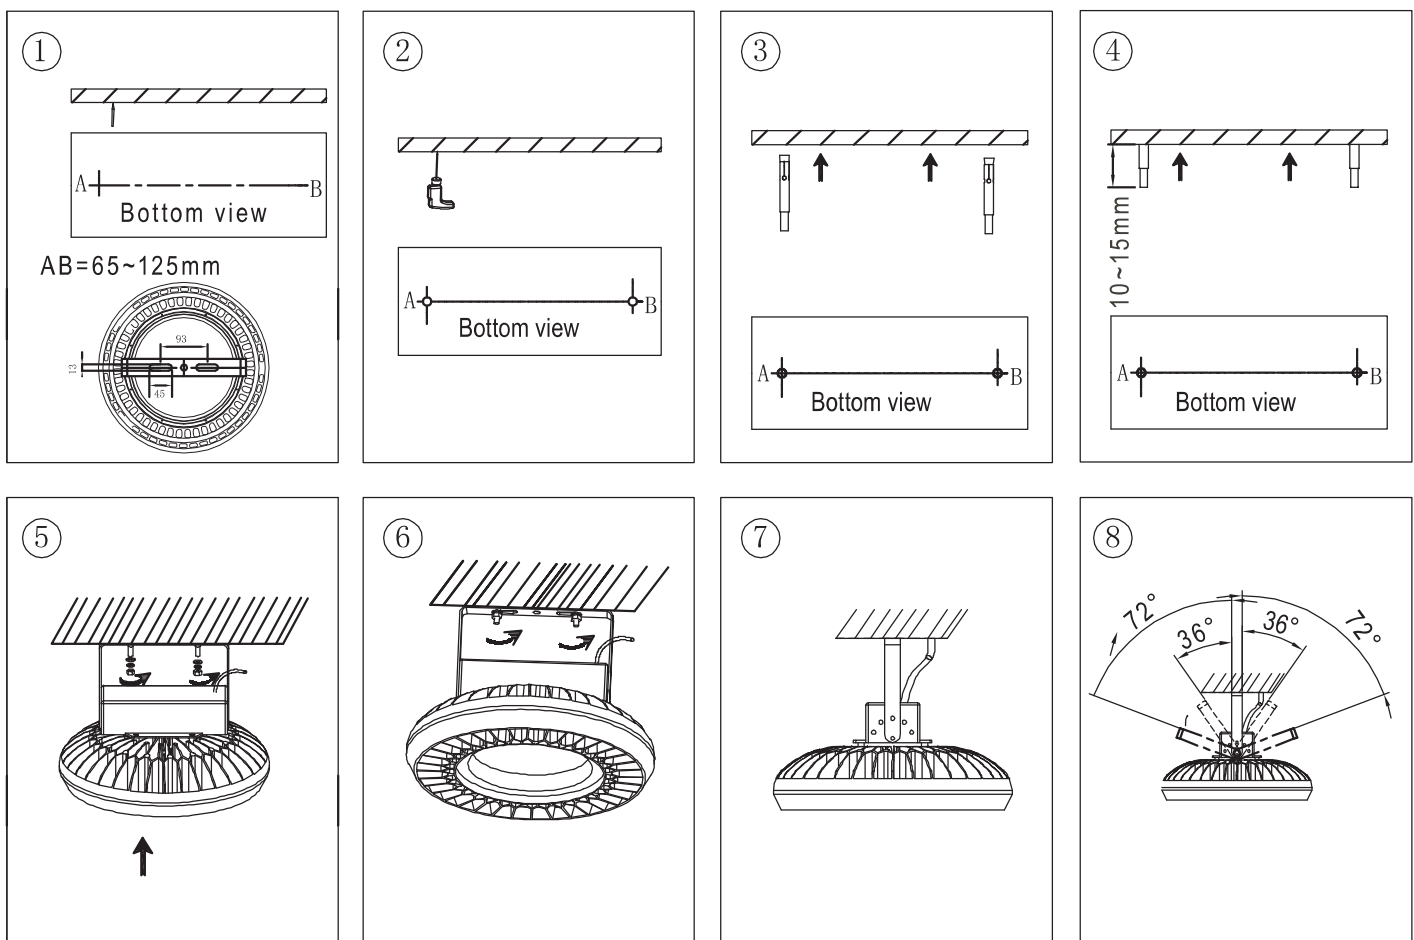

Caution

1. Read these instructions carefully before any work and leave a copy for the user or maintenance engineer for future reference.
2. This product must be installed by competent and qualified electricians and in accordance with local Wiring Regulations and Building Regulations of related country or region.
3. Make sure the electricity is switched off at the mains during the installation and NO other person can restore the electrical supply without the knowledge of the installer.
4. To avoid electrical shock, do NOT install this product in raining days.
5. Remember to wear gloves to avoid injury before the installation.
6. Make sure that all electrical connections are tight and NO loose strands have been left out from the connection block.
7. If any cable or cord of this product is damaged, it shall be exclusively replaced by the manufacturer of his service agent or a similar qualified person in order to avoid hazard.
8. During or after installation, if there is any smoke or fire from the product, please turn off the power immediately and notify relevant personnel of an overhaul.
9. Do NOT touch the product when it is ON.
10. Check with your local authority of retailer for recycling advice.
11. This product can be used for outdoor installation.

Application

